

## Portable Infrared Thermometer

## Noncontact Temperature Measurement



## The MiniTemp™ IR thermometer—a new way to solve common problems.

Infrared (IR) thermometers have become the preferred tool for diagnostics and inspection where temperature is an indicator. Raytek IR thermometers are valued by professionals in a variety of industries—from industrial maintenance to food service, because they quickly, accurately and safely measure surface temperature! Anywhere that temperature is a factor in process, product quality or diagnostics, a Raytek IR thermometer should be close at hand.

IR thermometers are easy to use, and since they do not contact the object being measured, they are the safest way to measure hot, hard-to-reach, or moving parts, while eliminating potential damage and contamination.

The Raytek MiniTemp MT2 and MiniTemp MT4 thermometers incorporate many of the same features found in professional IR thermometers. The MiniTemp thermometer is perfect for auto enthusiasts performing self diagnostics and for those tackling home improvement projects. Use it for spotting costly energy losses around windows and doors, monitoring critical temperatures in kitchen or workshop, or ensuring the environment is comfortable and safe.

Just pull the trigger! The MiniTemp thermometer shows the temperature in an instant on its large, backlit display. The simple to use MiniTemp thermometer becomes even easier to operate when aiming with the laser point (MT4). The Raytek MiniTemp thermometer: Smart, Simple, Safe—Convenient!

- Simple to use
- Instant readings
- Laser Point (MT4)
- Large, easy to read display
- Temperature Range (MT4) -18° to 400°C (0° to 750°F)
- °C or °F selectable




Specifications	MT2	MT4
Temperature range	-18 to 275°C (0 to 525°F)	-18 to 400°C (0 to 750°F)
Accuracy	-1°C (30°F) to 275°C (525°F) ±2% or ±2°C (±3.5°F) whichever is greater -18°C (0°F) to -1°C (30°F) ±3°C (±5°F)	
Repeatability	±2% of reading, or ±2°C (±3°F), whichever is greater	
Response time	500 mSec, 95% response	
Spectral response	7–18 μm	
Emissivity*	pre-set 0.95	
Ambient operating range	0 to 50°C (32 to 120°F)	
Relative humidity	10–95% RH noncondensing, @ up to 30°C (86°F)	
Storage temperature	-20° to 65°C (-4° to 150°F) without battery	
Weight / Dimensions	227 g (0.5 lb); 152 x 101 x 38 mm (6 x 4 x 1.5 in)	
Power	9V Alkaline or NiCd battery (included)	
Battery life (Alkaline)	22 hrs	12 hrs
Laser Class II	—	✓
Distance to Spot Size	8:1	
Typical Distance to Target (Spot)	Up to 1.5m or 4 ft	
Display Hold (7 seconds)	✓	✓
LCD Backlit	✓	✓
Temperature Display	°C or °F selectable	
Display Resolution	0.2°C (0.5°F)	
Options/Accessories	Nylon Holster	
Warranty	1 Year**	

\*For more information on emissivity for unique applications visit [www.raytek.com/emissivity.htm](http://www.raytek.com/emissivity.htm)


\*\*US only. Warranty duration may vary by country.

## Optical Resolution

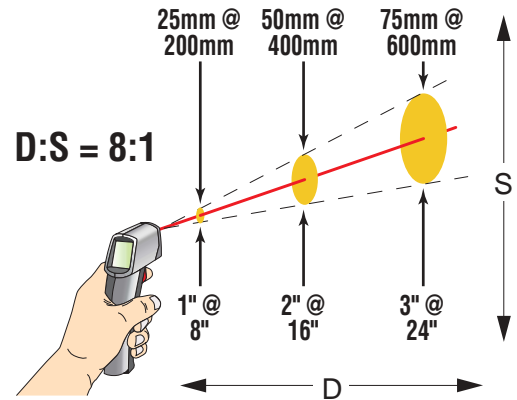

The MiniTemp thermometer is intended for close range targets, measuring a minimum target area of 1 inch in diameter out to a distance of approximately 8 inches, and has a 6 inch target measurement area at 4 feet.

## Laser Sighting



MT4 Model only

**Laser Point** Single-point laser indicates the approximate center of the target spot.

**KK Instruments**  
SUPPLYING RELIABLE TESTERS

1 831 458 1110  
Fax: 1 831 425 4561  
[solutions@raytek.com](mailto:solutions@raytek.com)

To find a Raytek office near you please visit [www.raytek.com](http://www.raytek.com)

### KK INSTRUMENTS & TOOLS

tel: +607-4352540  
fax: +607-4347299  
M-F : 9.30am-6pm  
Lunch: 1pm-2pm  
admin@testequipmentmalaysia.com



[www.TestEquipmentMalaysia.com](http://www.TestEquipmentMalaysia.com) | [www.TestoMalaysia.com](http://www.TestoMalaysia.com)

### DEALER.STOCKIST.EXPORTER

Accepting Local & Foreign Orders  
100% Fulfilling Rate and Confirm Delivery

**BUY WITH CONFIDENCE**



Raytek is an ISO 9001 certified company

©2004 Raytek Corporation (1-1101/Rev. F) 4/2005  
Raytek, the Raytek logo, MiniTempFS and the MiniTemp logo  
are registered trademarks, and Laser Point is a trademark of  
Raytek Corporation. Specifications subject to change without notice.